


# Product description

## Mobile track mounted impact crusher R900

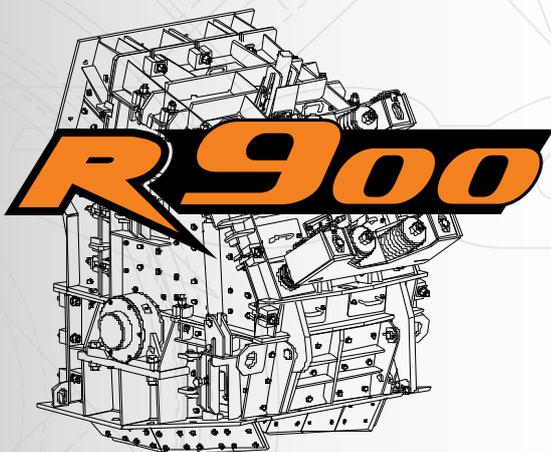

Kormann Rockster Recycler GmbH - Wirtschaftszeile West 2, 4482 Ennsdorf, Austria  
Tel.: +43 (7223) 81 000, Fax.: +43 (7223) 81 000 329, E-mail: office@rockster.at

[www.rockster.at](http://www.rockster.at)

**ROCKSTER**<sup>®</sup>  
RECYCLER

## Application Areas of R900

### Flexible, powerful and reliable

Due to limited disposal possibilities, rising landfill site tipping costs, and the ever increasing shortage of raw material, an **improved nonpolluting** solution is required.


Consequently recycling and the reprocessing of construction debris get more and more important nowadays.

The **mobile track mounted impact crusher R900** made by **Rockster** is based on a fully hydraulic concept and convinces with perfect cubic final grain quality and highest performance. The plant allows flexible recycling of asphalt, concrete and demolition debris. Moreover, the **R900** is also excellent suitable for processing of hard natural stone.

The R900 is the optimal solution for recycling and crushing procedures of:



## Main dimensions

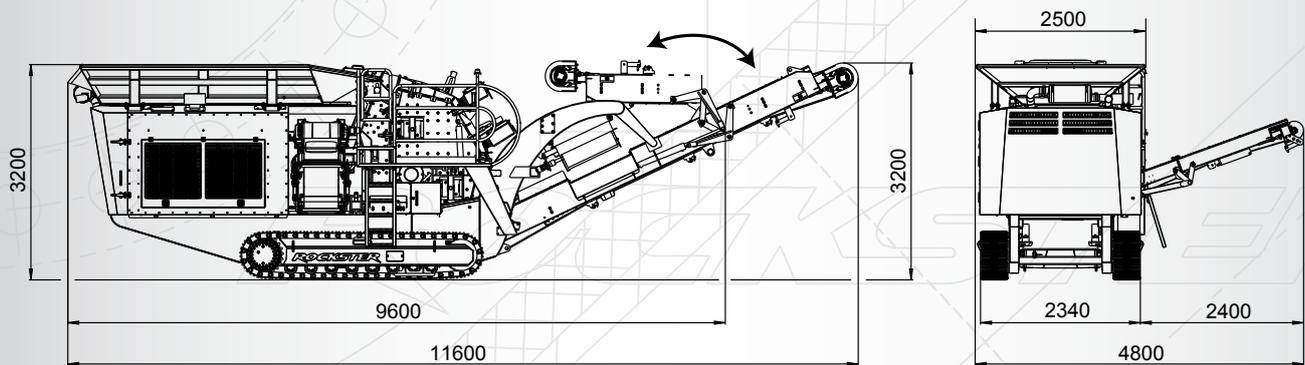

### Transport dimensions:

Length: 9,60 m | 31.5 ft

Width: 2,50 m | 8.2 ft

Height: 3,20 m | 10.5 ft

Transport Weight: 25,2 t | 55,600 lbs

Feeding height: 3,20 m | 10.5 ft

### Discharge height:

Main discharge belt: ~ 3,2 m | 10.5 ft

Side discharge belt: ~ 2,3 m | 7.6 ft


## Technical Details

### Maximum flexibility

The **Rockster** Impact crusher guarantees **highest performance** at a very high crushing ratio. Due to 2 hydraulically adjustable swing-beams, as well as **variation of the rotor speed**, the final grain can be optimally influenced.

The quality of the hammers is chosen individually, depending on the application and can be used bi-laterally.

High quality wear materials ensure reduced wear.

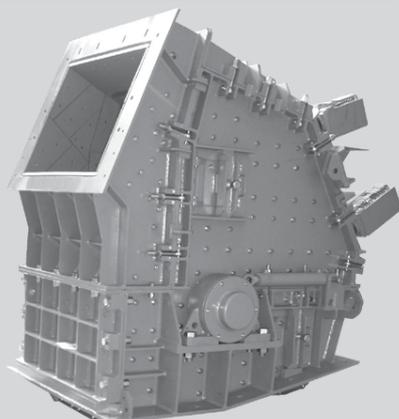

### Impact crusher

Inlet opening: 900 x 720 mm | 36 x 29 in

Impact circle diameter: 1020 mm | 41 in

Rotor equipment: 4 hammers

Crushing ratio: 1:10 - 1:50

Performance: up to 240 t/h | 270 st/h

Rotor speed: up to 850 rpm

Weight: 7.550 kg | 16,645 lbs

Drive: hydrostatic

Gap adjustment: hydraulic

## Technical details



### Drive:

Engine: VOLVO TIER3 200 kW | 268 hp  
VOLVO TIER4f 210 kW | 282 hp  
electronically regulated  
Cylinder: 6  
Cooling system: water

The drive system is located at the rear of the machine, enclosed in a sound-proofed housing. For maintenance and service purposes the casing can be opened completely on all sides.

The hydraulic pump for all auxiliary drives (main discharge belt, side discharge belt, vibration chute, crawler gear...) as well as the pump for the hydrostat

are driven via a distributing gear unit which is flange-mounted on the drive engine.

The hydrostat activates the crusher via a V-belt drive.

### Advantages of the hydrostatic drive:

- individually **adjustment of crusher speed**
- adjustment of rotating direction (R800)
- the usual **clutch is replaced**



### Feedhopper:

Material: Hardox 400  
Volume: 4 m<sup>3</sup> | 5.3 yd<sup>3</sup>  
Feeding length: 3800 mm | 12.5 ft  
Feeding width: 2500 mm | 8.2 ft  
Feeding height: 3200 mm | 10.5 ft



### Vibration chute with pre-screening:

Material: Hardox 450  
Length pre-screening: 1200 mm | 4.0 ft  
Width: 900 mm | 3 ft  
Type: ZigZag  
Option: bar screen  
Drive: hydraulic  
infinitely variable



### Bypass:

The switchable chute (Bypass) allows the discharge of the pre-screened material on the side or main discharge belt.

Easy switch via hand gear -

**no special assembly necessary!**

## Technical details



### Main discharge belt:

Belt width: 1000 mm | 40 in  
Discharge height: ~ 3,2 m | 10.5 ft  
Angle: 26°  
Drive: hydraulic, continuously variable  
The main discharge belt is foldable hydraulically for transport.



### Side discharge belt:

Belt width: 500 mm | 20 in  
Discharge height: ~ 2,3 m | 7.6 ft  
Angle: 20°  
Drive: hydraulic  
The side discharge belt is foldable hydraulically for transport.



### Magnetic separator:

Type: Permanent magnet  
Belt width: 750 mm | 30 in  
Weight: 1200 kg | 2,645 lbs  
Drive: hydraulic



### Caterpillar crawler:

Tread width: 400 mm | 16 in  
slanted  
Wheel base: 2900 mm | 9.6 ft  
Surface: triple ribbed pads  
Drive: 2-speed hydraulic



### Control panel:

Central control/operating unit ensures an easy operation and machine monitoring in connection with a remote control.

## Special features



### Environmental Compatibility:

Reduction of emissions through:

- efficient dust suppression and
- sound-proofed housing



### Easy service & ideal accessibility:

The large-scale covers allow an optimal accessibility for service and maintenance and furthermore ensure the best ventilation of the drive-unit and the cooler.



## Options:



belt weigh scale




water pump



central lubrication



main belt - wear protection

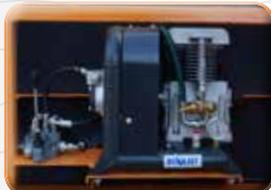

air compressor



sound protection cover



hammer exchange system

## Option: Screening system Screenbox RS83 + return belt RB75



### Defined final grain in one workflow:

The optional screening system - consisting of the compact circular vibrating screen RS83 in combination with the return belt RB75 - is the perfect addition for the track-mounted R900 for the production of 100 % defined final grain. The components are mounted directly on the main discharge belt and are driven through the additional hydraulic system of the crushing plant.



### Technical Details:

Screen size: 1830 x 1200 mm | 6.0 x 4.0 ft  
Standard screen: 38 mm | 1.5 in  
Special meshes on demand.

### Discharge conveyor fines:


Belt width: 800 mm | 32 in  
Discharge height: ~ 3,2 m | 10.5 ft

### Discharge conveyor oversize grain:

Belt width: 500 mm | 20 in

### RB75 return belt:

Belt width: 400 mm | 16 in

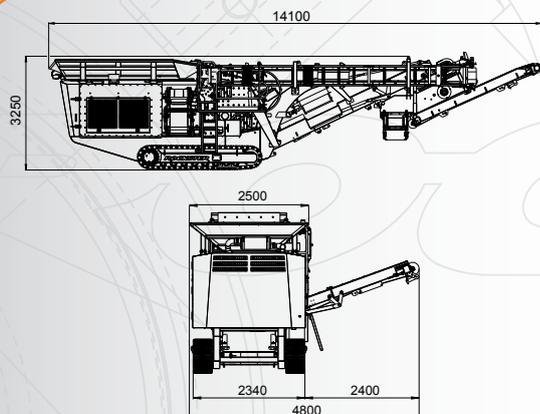

### Transport dimensions R900 + RS83 + RB75:

Length: 14,10 m | 46.3 ft  
Width: 2,50 m | 8.2 ft  
Height: 3,25 m | 10.7 ft  
Total weight: 28,6 t | 63,100 lbs

## General information

### The company

The company **Kormann Rockster Recycler GmbH** specializes in the development and production of mobile crushing and screening systems. The Rockster-team consists exclusively of long-time market insiders, each bringing **years of experience** into perfecting the Rockster design concept, as well as being personally available to share their expertise with customers.

Customer orientation and maximum customer care is the ultimate ambition of all Rockster products and services.

The key criteria specified by Rockster are **maximum performance** and **quality**, operating and maintenance friendliness as well as easy transportation due to **compact dimensions** and low weight.

### The ROCKSTER concept

**RELIABILITY** - maximum reliability due to the highest product quality standards.

**OPERATING EFFICIENCY** - higher operational efficiency due to the transport dimensions (easy transport – no special permits in many cases), simple maintenance and handling.

**CAPACITY** - higher production capacity as a result of special high-speed rotor and enormous power reserves for the drive systems.

**KNOWLEDGE** - many years of practical experience in advanced machine design creates tremendous value for customers.

**SERVICE** - round-the-clock service and support is the company hallmark, with rapid response and immediate availability of spare and wear parts.

**TECHNOLOGY** - using industry-standard brand components assures adherence to the highest technical standard.

**ENVIRONMENT FRIENDLY** - engineered to meet the highest environmental standards with the installation of low-pollution engines and complex sound suppression systems.

**REVENUE** - designed to meet customers' revenue and return-on-investment requirements due to low investment and operating costs, plus the unique advantages of the DUPLEX system – maximizing machine utilization with multiple crusher capabilities on one carrier.

[www.rockster.at](http://www.rockster.at)

Print and punctuation errors excepted. Content is subject to change without notice.

Kormann Rockster Recycler GmbH - Wirtschaftszeile West 2, 4482 Ennsdorf, Austria  
Tel.: +43 (7223) 81 000, Fax.: +43 (7223) 81 000 329, E-mail: [office@rockster.at](mailto:office@rockster.at)



**ROCKSTER**<sup>®</sup>  
RECYCLER